


CP- UNC-TA20L3S**2MP HD IP Bullet Camera - 30Mtr.****Main Features**

- 1/2.7" 2Megapixel progressive scan CMOS
- 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- Array Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

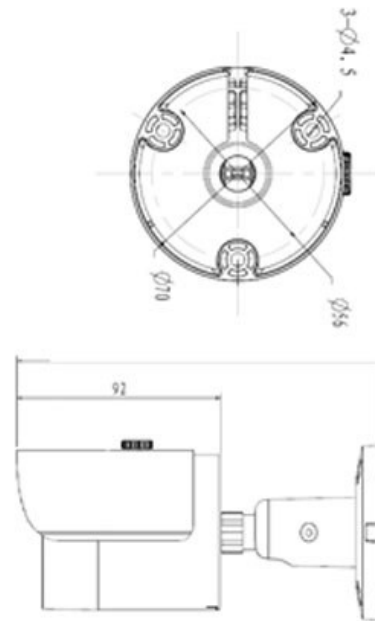

CP- UNC-TA20L3S**2MP HD IP Bullet Camera - 30Mtr.****Feature**

Image Sensor

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control(AGC)

Back Light Compensation

S/N Ratio

Video Compression

Resolution

Frame Rate

Privacy Mask

ICR

Protocol

Ethernet

User Account

IR

Smart Phone

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

1/2.7" 2Megapixel progressive scan CMOS

0. 1Lux/F2.1(Color), 0Lux/F2.1(IR on)

Auto/Manual, 1s~1/100000s

Auto/Manual

3.6mm fixed lens (6mm optional)

Auto/Manual

BLC/ HLC/ DWDR

More than 50dB

H.264/ H.264H/ H.264B/ MJPEG

1080P(1920×1080)/720P(1280×720)/D1(704×576/704×480) /CIF(352×288/352×240)

Main Stream :1080P(1 ~ 25/30fps),Sub Stream :D1(1 ~ 25/30fps)

Up to 4 areas

Auto(ICR)/Color/B/W

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour

RJ-45 (10/100Base-T)

20 Users

IR Range of 30 Mtr.

iPhone, iPad, Android, Windows Phone

-30°C~+60°C , Less than 95%RH

DC12V, PoE (802.3af)

<4.8W(IR on)

IP67

Φ70mm×165mm

0.38Kg(with package 0.44 Kg)