

Listen-In Module
DGP-LSN4 V1.1

Programming Guide



paradox.com

Printed in Canada- 12/2007
DGPLSN4-EP02

Section [001] : Substation 1 Partition Assignment

Option	OFF	ON
[1] Partition 1	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[2] Partition 2	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[3] Partition 3	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] Partition 4	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[5] Partition 5	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[6] Partition 6	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[7] Partition 7	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[8] Partition 8	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled

Section [002] : Substation 2 Partition Assignment

Option	OFF	ON
[1] Partition 1	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[2] Partition 2	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[3] Partition 3	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] Partition 4	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[5] Partition 5	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[6] Partition 6	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[7] Partition 7	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[8] Partition 8	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled

Section [003] : Substation 3 Partition Assignment

Option	OFF	ON
[1] Partition 1	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[2] Partition 2	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[3] Partition 3	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] Partition 4	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[5] Partition 5	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[6] Partition 6	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[7] Partition 7	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[8] Partition 8	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled

Section [004] : Substation 4 Partition Assignment

Option	OFF	ON
[1] Partition 1	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[2] Partition 2	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[3] Partition 3	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] Partition 4	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[5] Partition 5	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[6] Partition 6	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[7] Partition 7	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[8] Partition 8	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled

Section [005] : General Options1

Option	OFF	ON
[1] Module Tamper Input	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[2] Telephone Line Monitoring	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[3] Volume Bypass	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] Continuous Recording	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[5] Bypass Siren on Communication	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[6] Locate Feedback on Substations	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[7] Response Connection Code	<input checked="" type="checkbox"/> Direct	<input type="checkbox"/> Press *
[8] Call Back Connection	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled

Section [006] : General Options 2

Option	OFF	ON
[1] Substation 1 Anti-tamper Switch	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[2] Substation 2 Anti-tamper Switch	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[3] Substation 3 Anti-tamper Switch	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[4] Substation 4 Anti-tamper Switch	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[5] Background Music Input	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[6] User Phonenumber Menu Selection	<input checked="" type="checkbox"/> User	<input type="checkbox"/> Monitoring
[7] Monitoring Station Phonenumber Menu Selection	<input type="checkbox"/> User	<input checked="" type="checkbox"/> Monitoring
[8] User Phonenumber Default Menu	<input type="checkbox"/> Arm/Disarm	<input checked="" type="checkbox"/> Listen-In

Section [007] : Connection Options 1

Option	OFF	ON
[1] Zone Alarm starts Listen-in Mode	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[2] Fire Alarm starts Listen-in Mode	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[3] Duress Alarm starts Listen-in Mode	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] Panic Police starts Listen-in Mode	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[5] Panic Medical starts Listen-in Mode	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[6] Panic Fire starts Listen-in Mode	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[7] Zone Tamper starts Listen-in Mode	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[8] Zone Supervision starts Listen-in Mode	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled

Section [008] : Connection Options 2

Option	OFF	ON
[1] Zone Fire Loop Trouble starts Listen-In Mode	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[2] Module Tamper starts Listen-in Mode	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[3] Door Force Alarm starts Listen-In Mode	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[4] Bus Fault starts Listen-in Mode	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[5] Police Code starts Listen-In Mode	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[6] - [8] Future use	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A

Section [009] : Substation 1 Page Options

Option	OFF	ON
[1] N/A	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A
[2] Substation 1 can page Substation 2	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[3] Substation 1 can page Substation 3	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] Substation 1 can page Substation 4	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[5] - [8] Future Use	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A

Section [010] : Substation 2 Page Options

Option	OFF	ON
[1] Substation 2 can page Substation 1	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[2] N/A	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A
[3] Substation 2 can page Substation 3	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] Substation 2 can page Substation 4	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[5] - [8] Future Use	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A

Section [011] : Substation 3 Page Options

Option	OFF	ON
[1] Substation 3 can page Substation 1	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[2] Substation 3 can page Substation 2	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[3] Future Use	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A
[4] Substation 3 can page Substation 4	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[5] - [8] Future Use	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A

Section [012] : Substation 4 Page Options

Option	OFF	ON
[1] Substation 4 can page Substation 1	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[2] Substation 4 can page Substation 2	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[3] Substation 4 can page Substation 3	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] - [8] Future Use	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A

Section [013] : Substation Panic Button Options

Option	OFF	ON																								
[1] & [2]	<table border="1"> <thead> <tr> <th colspan="2">Substation 1 Panic Button Options</th> </tr> <tr> <th>[1]</th> <th>[2]</th> </tr> </thead> <tbody> <tr> <td>OFF</td> <td>OFF</td> <td>Disabled (default)</td> <td><input type="checkbox"/> see table</td> <td><input type="checkbox"/> see table</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>Police panic</td> <td><input type="checkbox"/> see table</td> <td><input type="checkbox"/> see table</td> </tr> <tr> <td>OFF</td> <td>ON</td> <td>Medical panic</td> <td></td> <td></td> </tr> <tr> <td>ON</td> <td>ON</td> <td>Fire panic</td> <td></td> <td></td> </tr> </tbody> </table>	Substation 1 Panic Button Options		[1]	[2]	OFF	OFF	Disabled (default)	<input type="checkbox"/> see table	<input type="checkbox"/> see table	ON	OFF	Police panic	<input type="checkbox"/> see table	<input type="checkbox"/> see table	OFF	ON	Medical panic			ON	ON	Fire panic			
Substation 1 Panic Button Options																										
[1]	[2]																									
OFF	OFF	Disabled (default)	<input type="checkbox"/> see table	<input type="checkbox"/> see table																						
ON	OFF	Police panic	<input type="checkbox"/> see table	<input type="checkbox"/> see table																						
OFF	ON	Medical panic																								
ON	ON	Fire panic																								
[3] & [4]	<table border="1"> <thead> <tr> <th colspan="2">Substation 2 Panic Button Options</th> </tr> <tr> <th>[3]</th> <th>[4]</th> </tr> </thead> <tbody> <tr> <td>OFF</td> <td>OFF</td> <td>Disabled (default)</td> <td><input type="checkbox"/> see table</td> <td><input type="checkbox"/> see table</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>Police panic</td> <td><input type="checkbox"/> see table</td> <td><input type="checkbox"/> see table</td> </tr> <tr> <td>OFF</td> <td>ON</td> <td>Medical panic</td> <td></td> <td></td> </tr> <tr> <td>ON</td> <td>ON</td> <td>Fire panic</td> <td></td> <td></td> </tr> </tbody> </table>	Substation 2 Panic Button Options		[3]	[4]	OFF	OFF	Disabled (default)	<input type="checkbox"/> see table	<input type="checkbox"/> see table	ON	OFF	Police panic	<input type="checkbox"/> see table	<input type="checkbox"/> see table	OFF	ON	Medical panic			ON	ON	Fire panic			
Substation 2 Panic Button Options																										
[3]	[4]																									
OFF	OFF	Disabled (default)	<input type="checkbox"/> see table	<input type="checkbox"/> see table																						
ON	OFF	Police panic	<input type="checkbox"/> see table	<input type="checkbox"/> see table																						
OFF	ON	Medical panic																								
ON	ON	Fire panic																								
[5] & [6]	<table border="1"> <thead> <tr> <th colspan="2">Substation 3 Panic Button Options</th> </tr> <tr> <th>[5]</th> <th>[6]</th> </tr> </thead> <tbody> <tr> <td>OFF</td> <td>OFF</td> <td>Disabled (default)</td> <td><input type="checkbox"/> see table</td> <td><input type="checkbox"/> see table</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>Police panic</td> <td><input type="checkbox"/> see table</td> <td><input type="checkbox"/> see table</td> </tr> <tr> <td>OFF</td> <td>ON</td> <td>Medical panic</td> <td></td> <td></td> </tr> <tr> <td>ON</td> <td>ON</td> <td>Fire panic</td> <td></td> <td></td> </tr> </tbody> </table>	Substation 3 Panic Button Options		[5]	[6]	OFF	OFF	Disabled (default)	<input type="checkbox"/> see table	<input type="checkbox"/> see table	ON	OFF	Police panic	<input type="checkbox"/> see table	<input type="checkbox"/> see table	OFF	ON	Medical panic			ON	ON	Fire panic			
Substation 3 Panic Button Options																										
[5]	[6]																									
OFF	OFF	Disabled (default)	<input type="checkbox"/> see table	<input type="checkbox"/> see table																						
ON	OFF	Police panic	<input type="checkbox"/> see table	<input type="checkbox"/> see table																						
OFF	ON	Medical panic																								
ON	ON	Fire panic																								
[7] & [8]	<table border="1"> <thead> <tr> <th colspan="2">Substation 4 Panic Button Options</th> </tr> <tr> <th>[7]</th> <th>[8]</th> </tr> </thead> <tbody> <tr> <td>OFF</td> <td>OFF</td> <td>Disabled (default)</td> <td><input type="checkbox"/> see table</td> <td><input type="checkbox"/> see table</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>Police panic</td> <td><input type="checkbox"/> see table</td> <td><input type="checkbox"/> see table</td> </tr> <tr> <td>OFF</td> <td>ON</td> <td>Medical panic</td> <td></td> <td></td> </tr> <tr> <td>ON</td> <td>ON</td> <td>Fire panic</td> <td></td> <td></td> </tr> </tbody> </table>	Substation 4 Panic Button Options		[7]	[8]	OFF	OFF	Disabled (default)	<input type="checkbox"/> see table	<input type="checkbox"/> see table	ON	OFF	Police panic	<input type="checkbox"/> see table	<input type="checkbox"/> see table	OFF	ON	Medical panic			ON	ON	Fire panic			
Substation 4 Panic Button Options																										
[7]	[8]																									
OFF	OFF	Disabled (default)	<input type="checkbox"/> see table	<input type="checkbox"/> see table																						
ON	OFF	Police panic	<input type="checkbox"/> see table	<input type="checkbox"/> see table																						
OFF	ON	Medical panic																								
ON	ON	Fire panic																								

Section [014] : Substation Panic Audible Feedback

Option	OFF	ON
[1] Substation 1 Panic audible feedback	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[2] Substation 2 Panic audible feedback	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[3] Substation 3 Panic audible feedback	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[4] Substation 4 Panic audible feedback	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[5] - [8] Future Use	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A

Section [015] : Audio Message Options 1

Option	OFF	ON
[1] Audio Message on Exit Delay	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[2] Audio Message on Arming	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[3] Audio Message on Disarming	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[4] Audio Message on Entry Delay	<input type="checkbox"/> Disabled	<input checked="" type="checkbox"/> Enabled
[5] Welcome Audio Message	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[6] Goodbye Audio Message	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[7] Audio Message on System Trouble	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[8] Installer In/Out Audio Message	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled

Section [016] : Audio Message Options 2

Option	OFF	ON
[1] Music ON/OFF audio message	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[2] Personal recording ON/OFF audio message	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[3] Play "Armed" messages on Stay/Instant arming	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[4] Listen-In On/Off audio message	<input checked="" type="checkbox"/> Disabled	<input type="checkbox"/> Enabled
[5] Future Use	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A
[6] New alarm message (alarm in same partition)	<input type="checkbox"/> Beep	<input checked="" type="checkbox"/> Voice
[7] New alarm report message (alarm in other partition)	<input type="checkbox"/> Beep	<input checked="" type="checkbox"/> Voice
[8] To begin, enter account code message	<input type="checkbox"/> Beep	<input checked="" type="checkbox"/> Voice

Section [017] : Personalized Partition Audio Labels

Option	OFF	ON
[1] Partition 1's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[2] Partition 2's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[3] Partition 3's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[4] Partition 4's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[5] Partition 5's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[6] Partition 6's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[7] Partition 7's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[8] Partition 8's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal

Section [018] : Personalized User Audio Labels

Option	OFF	ON
[1] Master's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[2] User 2's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[3] User 3's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[4] User 4's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[5] User 5's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[6] User 6's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[7] User 7's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal
[8] User 8's audio label	<input checked="" type="checkbox"/> Default	<input type="checkbox"/> Personal

Section [019] : Personalized Audio Labels

Option	OFF	ON
[1] System's Audio Label	△ Default	<input type="checkbox"/> Personal
[2] Alarm message	△ Default	<input type="checkbox"/> Personal
[3] Fire alarm message	△ Default	<input type="checkbox"/> Personal
[4] - [8] Future Use	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A

Section [020] : Substation 1 Partition Status

Option	OFF	ON
[1] Plays status of Partition 1	<input type="checkbox"/> Disabled	△ Enabled
[2] Plays status of Partition 2	<input type="checkbox"/> Disabled	△ Enabled
[3] Plays status of Partition 3	<input type="checkbox"/> Disabled	△ Enabled
[4] Plays status of Partition 4	<input type="checkbox"/> Disabled	△ Enabled
[5] Plays status of Partition 5	<input type="checkbox"/> Disabled	△ Enabled
[6] Plays status of Partition 6	<input type="checkbox"/> Disabled	△ Enabled
[7] Plays status of Partition 7	<input type="checkbox"/> Disabled	△ Enabled
[8] Plays status of Partition 8	<input type="checkbox"/> Disabled	△ Enabled

Section [021] : Substation 2 Partition Status

Option	OFF	ON
[1] Plays status of Partition 1	<input type="checkbox"/> Disabled	△ Enabled
[2] Plays status of Partition 2	<input type="checkbox"/> Disabled	△ Enabled
[3] Plays status of Partition 3	<input type="checkbox"/> Disabled	△ Enabled
[4] Plays status of Partition 4	<input type="checkbox"/> Disabled	△ Enabled
[5] Plays status of Partition 5	<input type="checkbox"/> Disabled	△ Enabled
[6] Plays status of Partition 6	<input type="checkbox"/> Disabled	△ Enabled
[7] Plays status of Partition 7	<input type="checkbox"/> Disabled	△ Enabled
[8] Plays status of Partition 8	<input type="checkbox"/> Disabled	△ Enabled

Section [022] : Substation 3 Partition Status

Option	OFF	ON
[1] Plays status of Partition 1	<input type="checkbox"/> Disabled	△ Enabled
[2] Plays status of Partition 2	<input type="checkbox"/> Disabled	△ Enabled
[3] Plays status of Partition 3	<input type="checkbox"/> Disabled	△ Enabled
[4] Plays status of Partition 4	<input type="checkbox"/> Disabled	△ Enabled
[5] Plays status of Partition 5	<input type="checkbox"/> Disabled	△ Enabled
[6] Plays status of Partition 6	<input type="checkbox"/> Disabled	△ Enabled
[7] Plays status of Partition 7	<input type="checkbox"/> Disabled	△ Enabled
[8] Plays status of Partition 8	<input type="checkbox"/> Disabled	△ Enabled

Section [023] : Substation 4 Partition Status

Option	OFF	ON
[1] Plays status of Partition 1	<input type="checkbox"/> Disabled	△ Enabled
[2] Plays status of Partition 2	<input type="checkbox"/> Disabled	△ Enabled
[3] Plays status of Partition 3	<input type="checkbox"/> Disabled	△ Enabled
[4] Plays status of Partition 4	<input type="checkbox"/> Disabled	△ Enabled
[5] Plays status of Partition 5	<input type="checkbox"/> Disabled	△ Enabled
[6] Plays status of Partition 6	<input type="checkbox"/> Disabled	△ Enabled
[7] Plays status of Partition 7	<input type="checkbox"/> Disabled	△ Enabled
[8] Plays status of Partition 8	<input type="checkbox"/> Disabled	△ Enabled

Section Data

[024] User Connection Access	___/___/___ (000 to 255, 000 = All users, 001 = Master/User 1) Default: 001
------------------------------	--

- [025] Ring Counter
___/___ (000 to 032 x 1 ring, 000 = disabled)
Default: 006
- [026] Answering Machine Override Delay
___/___ (000 to 255 x 1 second, 000 = disabled)
Default: 030
- [027] TLM Fail Timer
___/___ (000 to 255 x 1 second, 000 = instant)
Default: 030
- [028] Call Back Connection delay
___/___ (001 to 030 x 1 minute)
Default: 005
- [029] Future Use
- [030] Connection Message Repeat Delay
___/___ (005 to 255 x 1 second)
Default: 030
- [031] Alarm Message Repeat Delay
___/___ (005 to 255 x 1 second)
Default: 020
- [032] Fire Alarm Message Repeat Delay
___/___ (005 to 255 x 1 second)
Default: 020
- [033] Response Connection Code Entry Delay
___/___ (010 to 060 x 1 second)
Default: 020
- [034] Call Back Connection Code Entry Delay
___/___ (020 to 060 x 1 second)
Default: 020
- [035] Pre-Alarm Audio Recording*
___/___ (005 to 115 x 1 second)
Default: 015
- [036] Post-Alarm Audio Recording*
___/___ (005 to 115 x 1 second)
Default: 015
- [037] Call Back Connection access code
___/___/___/___ (Default: 000000)

* The total of section [035] and [036] must be equal to or less than 120 seconds.

Section [038] : Substation 1 Mute Schedule


Schedule	Start Time	End Time	Day (1 to 8)
A	___/___	___/___	S M T W T F S H
B	___/___	___/___	S M T W T F S H

Section [039] : Substation 2 Mute Schedule

Schedule	Start Time	End Time	Day (1 to 8)
A	___/___	___/___	S M T W T F S H
B	___/___	___/___	S M T W T F S H

Section [040] : Substation 3 Mute Schedule

Schedule	Start Time	End Time	Day (1 to 8)
A	___/___	___/___	S M T W T F S H
B	___/___	___/___	S M T W T F S H

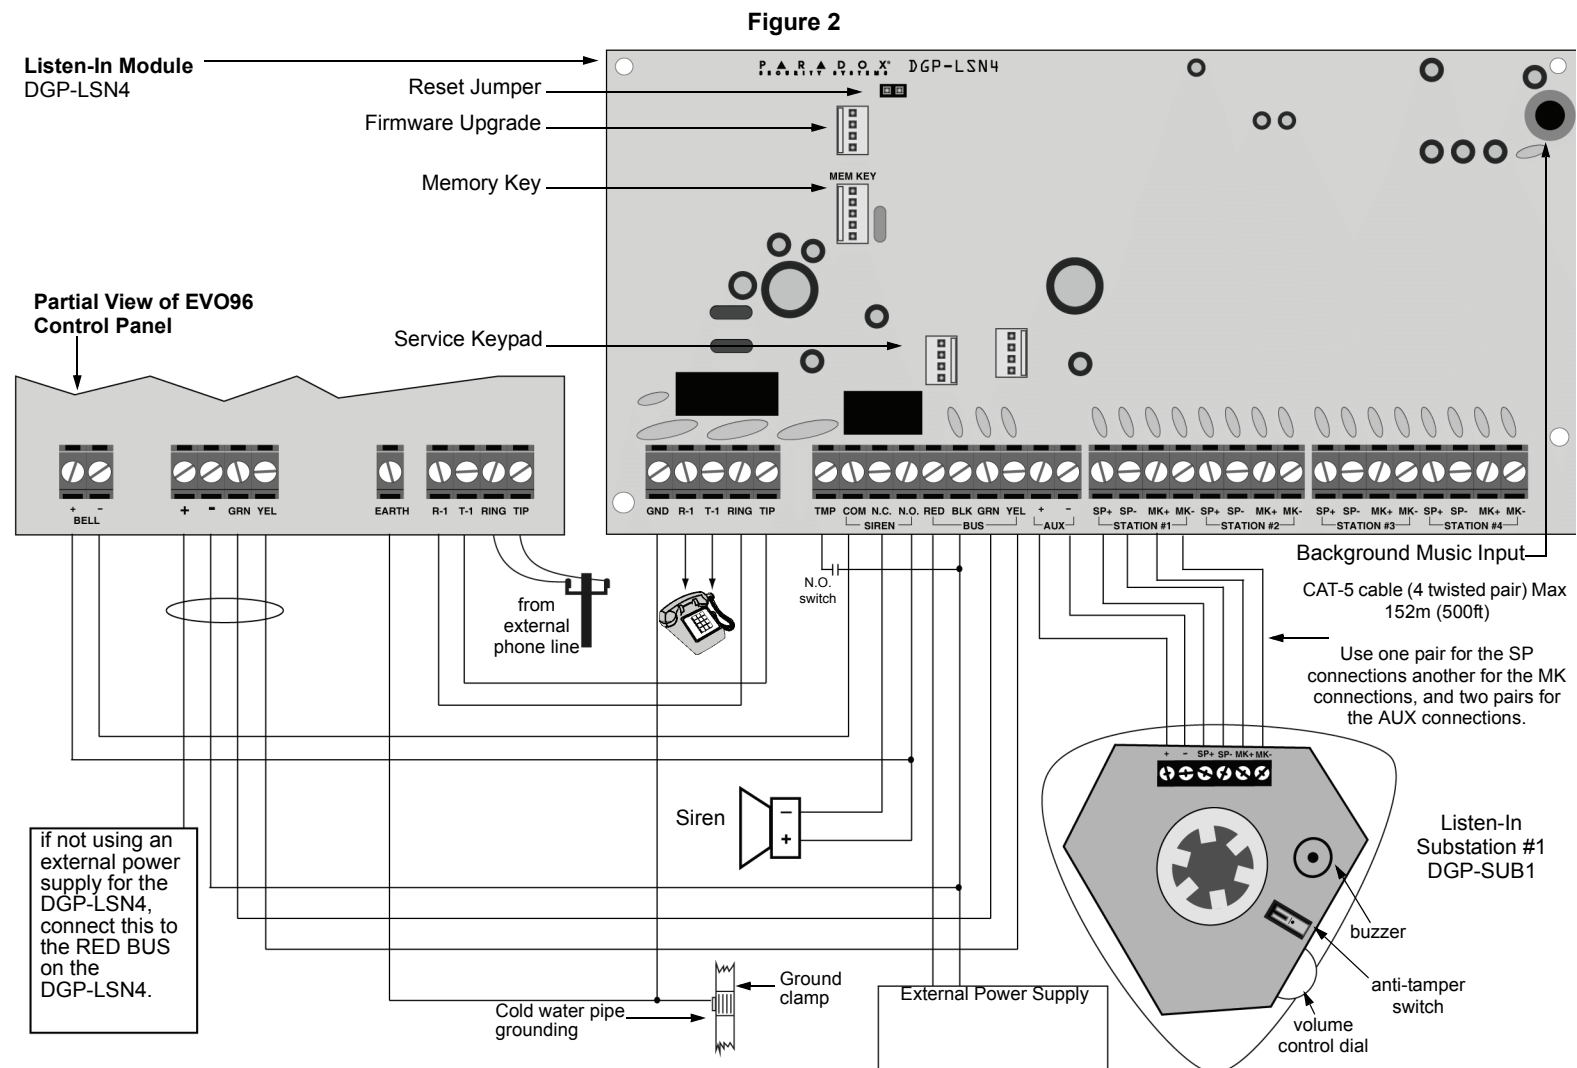

Section [041] : Substation 4 Mute Schedule

Schedule	Start Time	End Time	Day (1 to 8)
A	___/___	___/___	S M T W T F S H
B	___/___	___/___	S M T W T F S H

Section Description

- [060] Siren Bypass Relay Test: Activates the relay for 8 seconds
- [061] Phone Line Relay Test: Activates the relay for 8 seconds

Using the Memory Key (PMC5)

Section Description

- [100] Download programming from the Memory Key to the Listen-In Module
- [110] Copy programming from the Listen-In Module to the Memory Key

Download PMC5 Contents to the Listen-In Module

1. Insert the Memory Key onto the Listen-In Module's connector labelled "MEM KEY".
2. To download the contents of the Memory Key, enter the Listen-In Module's programming mode and enter section [100].
3. Once the keypad emits a confirmation beep, wait for a second confirmation beep and then remove the Memory Key.

Copy Listen-In Module Contents to PMC5

1. Insert Memory Key onto the Listen-In Module's connector labelled "MEM KEY". Ensure that the write protect jumper is on (refer to Memory Key (PMC5) below).
2. To copy the contents to the Memory Key, enter the Listen-In Module's programming mode and enter section [110].
3. Once the keypad emits a confirmation beep, wait for a second confirmation beep and then remove the Memory Key. Remove the Memory Key's jumper if you do not wish to accidentally overwrite its contents.

! The PMC5, PMC-4 and PMC-3 memory keys will both work with the DGP-LSN4 module.

Combust Voltmeter

To verify if the combust is supplying sufficient power, enter the Listen-In module programming mode and enter section [050]. A reading of 12V or lower indicates that the voltage is too low. The voltage may drop during the control panel or external power supply battery test. Press enter to refresh display.

Warranty

For complete warranty information on this product please refer to the Limited Warranty Statement found on the website www.paradox.com/terms. Your use of the Paradox product signifies your acceptance of all warranty terms and conditions.

© 2007-2008 Paradox Security Systems Ltd. All rights reserved. Specifications may change without prior notice. One or more of the following US patents may apply: 7046142, 6215399, 6111256, 6104319, 5920259, 5886632, 5721542, 5287111, 5119069, 5077549 and RE39406 and other pending patents may apply. Canadian and international patents may also apply.

Digiplex and Digiplex EVO are trademarks or registered trademarks of Paradox Security Systems Ltd. or its affiliates in Canada, the United States and/or other countries. For the latest information on products approvals, such as UL and CE, please visit www.paradox.com.