
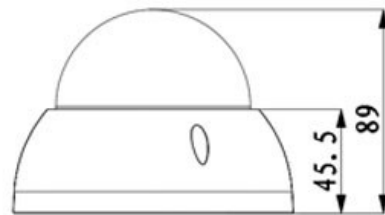


CP- UNC-VB40ZL3-VMD**4 MP Full HD IR Vandal Dome Camera - 30Mtr.****ORANGE****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4M and 25/30fps@3M
- H.264 and MJPEG dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 2.7~12mm varifocal lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VB40ZL3-VMD**4 MP Full HD IR Vandal Dome Camera - 30Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out
WDR
Protocol
Ethernet
User Account
Smart Phone
IR
Micro SD
Ingress Protection
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard

Specification

1/3" 4Megapixel progressive scan CMOS
0. 1Lux/F1.4(Color); 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
Auto/Manual
2.7mm~12mm
BLC/ HLC/ WDR
More than 50dB
H.264/ H.264H/ H.264B/ MJPEG
Main Stream: 4M(1~20fps)/3M(1~25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps)
4M(2688×1520)/4M(2560×1440)/3M(2304×1296)/1080P(1920×1080)/720P(1280×720)/D1
(704×576/704×480)/CIF(352×288/352×240)
Up to 4 areas
Auto(ICR)/Color/B/W
1 channel
G.711a/ G.711u/ AAC
1 channel
1 channel
1 channel
Supports
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP,
DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour,802.1x
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
Micro SD, Max 128GB
IP67
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<7.5W
IP67 & IK10

 **CP- UNC-VB40ZL3-VMD****4 MP Full HD IR Vandal Dome Camera - 30Mtr.****Feature**

Dimension

Weight

Specification

φ122mm × 89mm

0.5kg