


INTRODUCTION

Thanks to the scalability of GV-Series, you can easily integrate surveillance system and IP cameras, and load analog and digital video data into the same interface to become a comprehensive hybrid solution. The GV-Series Surveillance System is able to process video signals from IP cameras over TCP/IP network. Combining the best of both the analog and digital worlds, the GV-Hybrid DVR is a versatile video management platform. It answers needs for a transition from a legacy analog infrastructure towards a pure IP surveillance environment.

The GV-Hybrid DVR comes with a rich panel of features to streamline surveillance operations and enhance management capabilities. Remote surveillance is implemented via 3GPP, IE browser and GeoVision GV-MultiView. For the purpose of central monitoring, the GV-Hybrid DVR offers an extensible solution for multi-site surveillance and control to manage numerous cameras from subscribers.

[Supported IP Camera List](#)

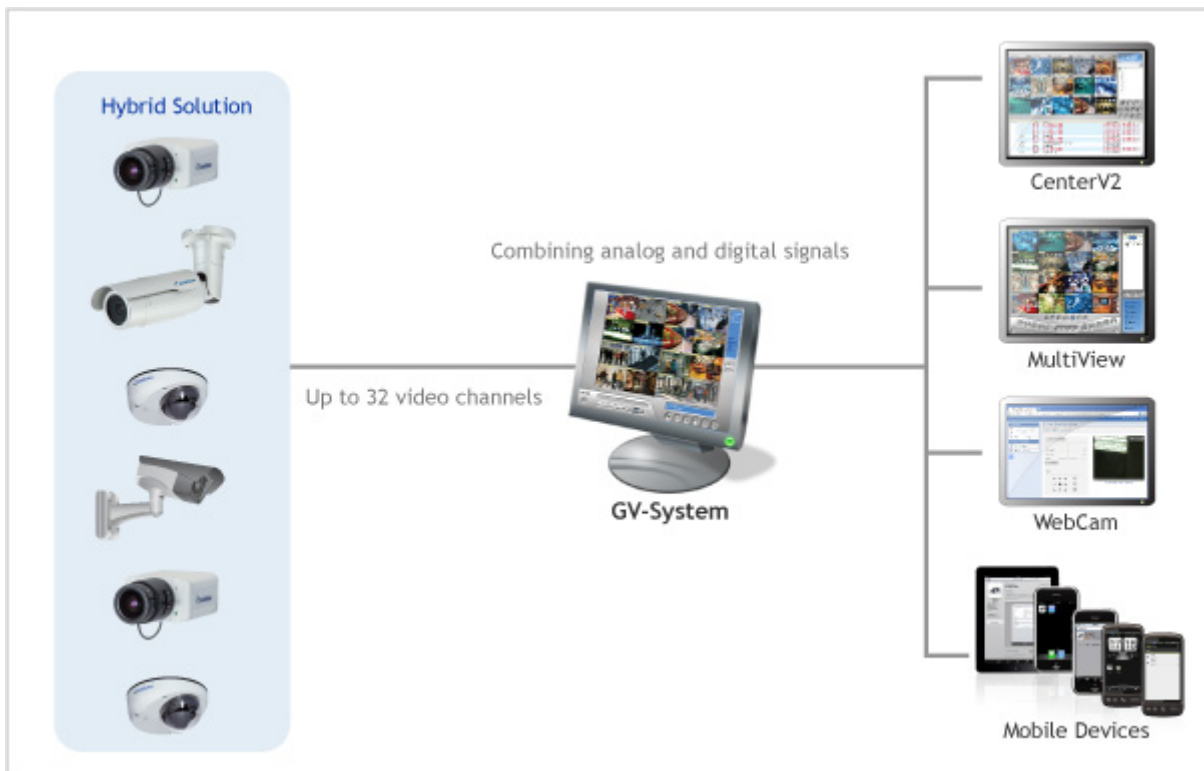

VERSION 8.5.7.0 NEW FEATURES

New:

- Support for Windows 8 (32 and 64-bit) and Server 2012 (64-bit)
- Digital PTZ for cameras without physical PTZ functions
- PIP function for dewarped fisheye view under Single View Mode
- Support for video settings and dual streaming of cameras connected through ONVIF
- Support for postponing the live view decoding time to improve video smoothness
- Set Language tool to manually set GeoVision software and applications to English
- Support for GV-3D People Counter in GV-IP Device Utility
- Support for Geovision GV-FE2301, GV-FE4301, GV-BL1200, GV-BL1300, GV-BL1210, GV-BL2410, GV-BL3410, GV-BL5310, GV-BL2400, GV-BL3400, GV-FD1200, GV-FD2400, GV-FD3400, GV-FD5300, GV-FD1210, GV-FD2410, GV-FD3410, GV-PT130D, GV-PT220D, GV-PT320D, GV-UBX1301 Series, GV-UBX2301 Series, GV-UBX3301 Series, GV-UBL1211, GV-UBL2411, GV-UBL3411, GV-UBL1301 Series, GV-UBL2401 Series, GV-UBL3401 Series
- Support for AXIS IP cameras Q6035-E
- Support for AXIS IP cameras: M3007, P3354, P3364, Q1604 through ONVIF connection
- Support for Bosch NBN-921-P through ONVIF connection
- Support for VIVOTEK IP cameras: FD8135H, FD8162, FD8372, FE8172, IP8172, IP8335H, IP8362, MD8562, SD8323E, SD8362E

Improved:

- Main System:
 - Improved GPU decoding efficiency and reduced memory usage by GV-system
 - Support for recording frame rate settings upon I/O trigger of analog cameras
 - Maximum system idle protection time extended from 5 minutes to 4 hours
 - Network Failure Detection function to trigger an output device when connection with a network host is interrupted
 - Minimum duration for video lost where the output device will only be triggered if the connection lost time exceeded the specified minimum duration
- ViewLog
 - Support for connecting GV-Recording Server, GV-Backup Server and GV-Backup Center using Remote ViewLog Service
 - Automatic switch to PIP mode after zooming in when video resolution exceeds ViewLog Panel
 - Support for Panorama View in Remote ViewLog
- WebCam and Remote Applications
 - Support for notifications with pre-event and post-event recordings attachments for the following event types: Video Lost, Video Signal Resumption, Intruder, Missing Object, Unattended Object, Crowd Detection, Advanced Unattended Object, Advanced Scene Change, Advanced Missing Objection (for Center V2 and Dispatch Server)
 - Notifications mechanism of GV-System for Center V2 and VSM server, which allows for notifications to be sent according to user-defined schedule without installing I/O devices to the GV-System
 - Support for Multi Windows on Chrome, Safari and Firefox, with which the user can now remotely select and display up to 16 out of 32 GV-System live views
 - Live view resolution on mobile devices from CIF to VGA using GV-AView V1.3.1 (for android devices) and GV-iView V2.3 (for iPhone and iPod Touch)

Key Feature List

▶ Monitoring

- Support for 32 channels in GV-System and CMS applications
- Support for GPU decoding
- Digital Matrix, support maximum 8 monitors display
- Hybrid Solution integrating analog videos with digital videos from GV-IP video products and third-party IP cameras (*)
- Codecs: Geo H264, Geo MPEG4
- Multithreading Encoding (*)
- Higher UI Screen Resolutions (1920 x 1200, 1680 x 1050, 1600 x 1200, 1280 x 800, 1440 x 900, 1920 x 1080 and 1280 x 1024)
- Noise Tolerance for Motion Detection
- Noise Detection to Reduce File Size (*)
- Noise Filter to Filter Out Video and Audio Noise (*)
- Report Generator
- Support for Cardholder data from GV-Video Server
- Touch Screen Support
- Full screen view
- Dual display operation for live monitoring and ViewLog playback on two monitors
- Screen pop-ups on motion or alarm activation
- Advanced Motion Detection
- Digital watermark
- Video lost detection
- On screen video loss message
- Video de-interlace filter
- E-map
- Windows lockup
- Image size indicator
- Synchronized video and audio
- Backlight compensation
- Video auto gain controller (*)
- Video scaling filter
- AVI repair utility
- System log
- Support 1,000 accounts for logins and passwords
- Multi level passwords protection
- Use Microsoft Remote Desktop to control another GV-System
- Twin DVR
- Embedded I/O devices control
- Embedded PTZ control panel
- Support dynamic IP address
- Password Expiration Management
- System Idle Protection
- Spot Monitor Controller
- POS Live Viewer
- Photo-ID Integration (GV-WT)
- Hard Disk Calculator (*)
- Authentication Server
- Colorful Mode to enhance video color
- Live view buffer and frame rate control
- Wide Angle Lens Dewarping
- Dual stream on-demand display (**)
- Fisheye GPU Dewarping (**)
- 3rd party Fisheye Dewarping (**)
- Support 3rd party IP Cameras - see IP Camera Support List(**)
- Support ONVIF, PSIA, RTSP protocol(**)

▶ Intelligent Recording & Playback

- Choice of recording at 30, 60, 120, 240, 480 and 960 fps (*)
- Recording trigger by round-the-clock, motion detection, alarm and schedule
- Adjustable recording quality and frame rate for each camera
- Pre-motion and post-motion recording
- Supports Windows XP / Vista / 7 / Server 2008 burning software
- Pre-Recording Using HDD
- Advanced Round-The-Clock Recording (*)
- Instant Playback
- Time Merge From Different Clips
- Splitting Files for Backup onto Multiple Discs
- Extracting Frames from a Video Clip During Playback
- Support for Daylight Saving Time (DST)
- Playback of GPS tracks from GV-Compact DVR and GV-Video Server
- Support for recording in standard type of H.264, MPEG4 and JPEG codec
- Support for saving dewarped fisheye view in AVI format
- Wide Angle Lens Dewarping
- Support for configuration change without stopping recording
- Compact Video files

▶ Audio

- 32 channels of live audio streaming and recording

▶ Video Analytics

- Object Counting (***)
- People Counting (***)
- Intrusion Alarm (***)
- Face Detection
- Privacy Mask
- Unattended and Missing Object Detection
- Scene Change Detection
- Advanced Scene Change Detection
- Advanced Unattended Object Detection
- Advanced Missing Object Detection
- Advanced Motion Detection
- Panorama View
- Video Stabilization
- Defog Function
- Crowd Detection
- Object tracking and zooming by PTZ domes (*)
- Object tracking in fisheye view
- Single PTZ Tracking
- Digital Object Tracking
- Face Count
- Camera Popup
- Video Lowpass filter

▶ **Smart Search & Ease Playback**

- Timeline Search
- Face Detection for Object Index
- Object search
- Index search
- Object Index
- Thumbnail browse for ease of search for specific frames within video footage
- Export a video footage within a specified time range

▶ **Notification**

- E-mail notification with attached video images on motion and alarm activation
- E-mail or telephone notification on video lost or I/O error
- Directs PTZ dome to a preset location on motion and alarm activation

▶ **WebCam - Remote Surveillance**

- POS Live View via IE Browser
- Support for connection with POS devices using OPOS and TCP/IP protocol
- 3G Mobile Phone Support (3GPP)
- SSL Encrypt Connection Support
- UPnP™ Support
- Control Panel on Single View to Provide Instant Information and Operation
- Support PIP, PAP, Defogging Live Videos, and Video Stabilizer in Single View

▶ **Advanced I/O Control**

- Visual Automation
- Virtual I/O Control
- One-Click I/O Status Control

▶ **Profile Management**

- Selectable GUI Skin
- Custom Start-Up Splash Screen, Non-Active Video & Video Lost Screen

▶ **Remote Monitoring Software**

- WebCam
- Remote Playback System

▶ **IT Technology**

- RSA Network Security
- Authentication Server: central control of password settings in local GV-DVRs

▶ **Central Monitoring Station (CMS)**

- Center V2
- Vital Sign Monitor
- Dispatch Server

▶ **Integration Solution**

- Point-Of-Sale
- EAS Integration
- Access Control

- Synchronized audio and video for both live and playback modes
- Continues playback of set frames A to B
- EXE format export, playable with any third-party players
- AVI format export in multiple screens mode
- DVD format export for Hybrid Card format files
- Option for recycling the input-triggered events (Never recycle function)

- SMS alerts available in Main System, Center V2 and Vital Sign Monitor
- Alarms on objects that pass between predefined regions

- Restricting Power User and User to Access WebCam Server at Specified Time Length
- Event List Query
- Download Center
- Drag-and-Drop Support for Camera, PTZ and I/O Icons on the 2 Windows of MPEG4 Encoder Viewer
- Remote E-Map
- Pop-up Live Images upon Input Trigger in Remote E-Map
- Multicast
- Audio Broadcast

- Multiple I/O Types Selection
- Latch Trigger Feature

- Customizing System Features
- Easy Configuration Backup & Restore
- Custom DVR Setting's Template

- Android Smartphones
- iPhone / iPod / iPad

- Authentication Server: Support for Windows Active Directory

- Control Center
- GV-GIS (Geographic Information System)

- Megapixel Integration
- Licence Plate Recognition
- Central Monitoring Station

Note:

(*) Not supported by GV-NVR

(**) Not supported by GV-DVR

(***) The Object Counting and the Intrusion Alarm functions require an AVP dongle.

VERSION 8.5.6.0 GV-Hybrid DVR Specifications

NVR		
Model	GV-NVR (GV)	GV-NVR
Video Input	32	1, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32
Audio Input	32	1, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32
Video Codec	MJPEG, MPEG4, H.264	
Audio Codec	16 kHz / 16 bit, 32 kHz / 16 bit	
Video Resolution	From CIF to 10 Mega pixel	
Networking	LAN, WAN, Internet, Modem Dial-up, Modem-to-Modem, ISDN	
Backup Device	HDD, NAS, CD-R / R-W, DVD+R / +RW, DVD+R (DL), ZIP, JAZ, Blu-ray, GV-Storage System	
Language	Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian / Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish	

Minimum System Requirements				
	GeoVision IP Camera	3rd-party IP Camera		
	Up to 32 Channels	1 - 4 Channels	5 - 8 Channels	Up to 32 Channels
OS	32-bit 64-bit	Windows XP / Vista / 7 / 8 / Server 2008 Windows 7 / 8 / Server 2008 R2 / Server 2012		
CPU	2nd Generation Core i3, 3.1 GHz	2nd Generation Core i3, 3.1 GHz	2nd Generation Core i5, 3.3 GHz	2nd Generation Core i7, 3.4 GHz
RAM	4 GB Dual Channels			
VGA	HD Graphics 2000		HD Graphics 3000	
Note: For the users of 32-bit Windows, the memory limit of GV-NVR is 1.7 GB with 2 GB RAM. For the users of 64-bit Windows, the memory limit of GV-NVR is 1.7 GB with 2 GB RAM and 3 GB with 4 GB RAM. If the high memory issue persists, the GV-NVR will become unstable.				

Minimum System Requirements	
Free License	32 channels from GV-IP devices
Maximum License	32 channels from third-party IP devices
Increment for Each License	1 to 32 third-party IP cameras at an increment of 2
Optional Combinations	N/A
Dongle Type	Internal or external

Frame Rate Limit in a Single Hard Disk				
Video resolution	MJPEG		H.264	
	Frame Rate	Bit Rate	Frame Rate	Bit Rate
5MP (2560x1920)	220 fps	8.5 Mbit/s	80 fps	30.4 Mbit/s
4MP (2048x1944)	330 fps	10.4 Mbit/s	105 fps	40.53 Mbit/s
3MP (2048x1536)	440 fps	9.83 Mbit/s	140 fps	38.67 Mbit/s
2MP (1920x1080)	660 fps	12.59 Mbit/s	210 fps	44.93 Mbit/s
1.3MP (1280x1080)	660 fps	6.16 Mbit/s	300 fps	32.26 Mbit/s

Note: The data above was determined using the bit rate listed above and hard disks with average R/W speed above 110 MB/s.

The frame rate limit is based on the resolution of video sources. The higher video resolutions, the lower frame rates you can assign to a single hard disk. In other words, the higher frame rates you wish to record, the more hard disks you need to install. For the information of recording frame rates, you may consult the user's manual of the IP camera that you wish to connect to.