


CP-VNC-V13FR3-M**1.3 MP HD VF IR Array Vandal Dome Camera - 30Mtr.****INDIGO****Main Features**

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG Triple-stream encoding
- DWDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
- 2.8~12mm Varifocal Lens
- IR Range of 30 Mtrs, Micro SD, IP66, IK10, PoE
- Mobile Software for Android, iOS
- CMS Software: IVMS

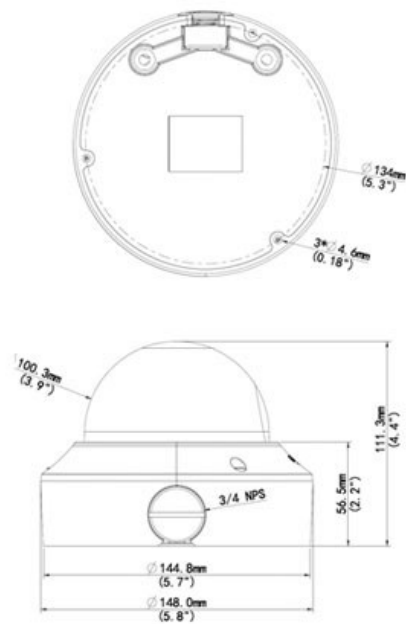

CP- VNC-V13FR3-M**1.3 MP HD VF IR Array Vandal Dome Camera - 30Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
S/N Ratio
Video Compression
Video Streaming
Resolution
Frame Rate
Privacy Mask
ICR
WDR
Protocol
Ethernet
OSD
IR
Micro SD
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 1.3MP Progressive scan CMOS
Colour: 0.03 Lux (F1.4, 50IRE), Black & White: 0.01Lux (F1.4, 50IRE)
Auto/Manual, 1/6~1/8000 s
Auto/Manual
Auto/Manual
2.8~12mm Varifocal Lens
>50dB
H.264/MJPEG
Triple
1.3MP @ 25fps
1.3MP(1280x960)/720P(1280x720)/D1720x576) @ 25 fps
Up to 4 areas
IR-cut filter with auto switch (ICR)
Digital
L2TP,IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTP,RTSP,Qos,NTP,FTP,HTTP,SNMP,SIP,
1 RJ45 10M/100M Base-TX Ethernet
Up to 8 OSDs
IR Range of 30 Mtr.
Up to 128 GB
-40°C ~ +60°C (-40°F ~ 140°F)
≤ 90% RH(non-condensing)
12 V DC, or PoE (IEEE802.3 af)
max.6.6 W (PoE :max.7.2 W)
IP66 & IK10
Φ148 x 111.3 mm (Ø5.8" x 4.4")
0.75 kg